

## 187.facerec

### Datasets profile vs. Reference Dataset

The following are the profiles for the 187.facerec benchmark. For more details about our profile development and dataset reduction methodology, refer to the paper by AJ KleinOsowski and David J. Lilja, "MinneSPEC: A New SPEC Benchmark Workload for Simulation-Based Computer Architecture Research", Computer Architecture Letters, Volume 1, June 2002. This paper is available in electronic form at <http://www.arctic.umn.edu/~lilja/minnespec/index.html>



[http:// www.arctic.umn.edu](http://www.arctic.umn.edu)

### Function level execution profile at optimization level O0

The following table contains function execution profiles and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets as compared to the full SPEC reference datasets. This data was gathered with the hiprof profiling utility. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall execution time spent in the stated function (in the Function column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi are the terms of the chi-squared statistic for the stated function (in the function column).

Function	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi
passb4_	40.80	55.90	5.59	67.00	16.82	29.00	3.41	8.10	26.21	21.30	9.32
\$graphroutines\$localmove_	21.30	9.40	6.65	0.50	20.31	0.30	20.70	0.00	21.30	0.00	21.30
TOPCOSTFCT	18.20	8.30	5.39	0.40	17.41	0.70	16.83	0.00	18.20	0.00	18.20
\$gaboroutines\$abortrafo_	8.30	11.20	1.01	13.50	3.26	7.40	0.10	8.60	0.01	9.20	0.10
sqrt	4.20	5.70	0.54	6.90	1.74	3.50	0.12	1.70	1.49	2.50	0.69
\$fft2d\$fft2db_	2.20	3.00	0.29	3.70	1.02	1.70	0.11	0.80	0.89	1.40	0.29
_OtsModulus64	1.70	2.30	0.21	2.60	0.48	0.60	0.71	1.40	0.05	1.80	0.01
passf4_	1.00	1.40	0.16	1.70	0.49	28.70	767.29	7.00	36.00	18.10	292.41
\$graphroutines\$raphsimfct_	0.70	0.90	0.06	0.80	0.01	0.90	0.06	0.60	0.01	0.70	0.00
_OtsDivide64	0.40	0.40	0.00	0.40	0.00	0.20	0.10	0.40	0.40	0.70	0.23
cfftbl_	0.30	0.40	0.03	0.50	0.13	0.10	0.13	0.30	0.00	0.70	0.53
for__interp_fmt	0.20	0.30	0.05	0.30	0.05	7.00	231.20	7.80	288.80	6.40	192.20
for__cvt_value	0.10	0.20	0.10	0.20	0.10	2.80	72.90	2.20	44.10	5.30	270.40
cvt_text_to_data	0.10	0.10	0.00	0.20	0.10	2.90	78.40	4.30	176.40	2.10	40.00
for_read_seq_fmt											
_xmit	0.10	0.20	0.10	0.20	0.10	2.80	72.90	2.50	57.60	2.10	40.00
sqrtf	0.10	0.10	0.00	0.20	0.10	2.60	62.50	3.10	90.00	0.40	0.90
\$fft2d\$fft2df_	0.10	0.10	0.00	0.10	0.00	1.50	19.60	1.00	8.10	2.50	57.60
Sum	99.80	99.90	20.17	99.20	62.13	92.70	1347.06	49.40	769.57	75.20	944.17
	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi

90% Confidence level (17 entries) = 23.542

## Function level execution profile at optimization level O1

The following table contains function execution profiles and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets as compared to the full SPEC reference datasets. This data was gathered with the hiprof profiling utility. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall execution time spent in the stated function (in the Function column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi are the terms of the chi-squared statistic for the stated function (in the function column).

Function	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi
\$graphroutines\$l											
ocalmove_	39.80	19.20	10.66	1.10	37.63	0.00	39.80	0.00	39.80	0.00	39.80
passb4_	20.00	30.00	5.00	37.90	16.02	16.40	0.65	3.10	14.28	8.30	6.84
\$gaboroutines\$g											
abortrafo_	16.60	24.00	3.30	30.40	11.47	13.70	0.51	12.80	0.87	8.30	4.15
TOPCOSTFCT	7.30	3.60	1.88	0.20	6.91	0.00	7.30	0.00	7.30	0.00	7.30
sqrt	6.40	9.40	1.41	12.30	5.44	4.50	0.56	3.10	1.70	3.80	1.06
\$fft2d\$fft2db_	3.90	5.50	0.66	7.60	3.51	2.70	0.37	0.90	2.31	3.20	0.13
_OtsModulus64	2.00	2.90	0.41	3.40	0.98	1.80	0.02	2.20	0.02		2.00
\$graphroutines\$g											
raphsimfct_	1.40	1.80	0.11	1.90	0.18	2.00	0.26	0.30	0.86	0.60	0.46
passf4_	0.50	0.70	0.08	0.90	0.32	15.30	438.08	4.10	25.92	9.00	144.50
for__interp_fmt	0.50	0.70	0.08	0.90	0.32	12.90	307.52	11.90	259.92	14.10	369.92
cfftbl_	0.30	0.50	0.13	0.70	0.53	0.00	0.30	0.60	0.30	1.30	3.33
_OtsDivide64	0.20	0.10	0.05		0.20		0.20		0.20		0.20
for_read_seq_fmt											
_xmit	0.20	0.30	0.05	0.40	0.20	5.70	151.25	5.00	115.20	5.10	120.05
cvt_text_to_data	0.20	0.30	0.05	0.40	0.20	4.70	101.25	4.70	101.25	4.50	92.45
for__cvt_value	0.20	0.20	0.00	0.40	0.20	3.70	61.25	6.20	180.00	4.50	92.45
sqrtf	0.20	0.20	0.00	0.30	0.05	4.30	84.05	3.40	51.20	5.10	120.05
\$fft2d\$fft2df_	0.10	0.10	0.00	0.20	0.10	2.90	78.40	1.90	32.40	4.50	193.60
\$imageroutines\$r											
eadimage_	0.10	0.10	0.00	0.10	0.00	1.20	12.10	1.90	32.40	0.00	0.10
Sum	99.90	99.60	23.86	99.10	84.26	91.80	1283.87	62.10	865.93	72.30	1198.39
	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi

90% Confidence level (18 entries) = 24.769

## Function level execution profile at optimization level O2

The following table contains function execution profiles and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets as compared to the full SPEC reference datasets. This data was gathered with the hiprof profiling utility. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall execution time spent in the stated function (in the Function column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi are the terms of the chi-squared statistic for the stated function (in the function column).

Function	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi
\$graphroutines\$localmove_	41.30	20.20	10.78	1.20	38.93	0.30	40.70	0.00	41.30	0.00	41.30
\$gaborroutines\$abortrafo_	19.30	28.70	4.58	36.90	16.05	11.50	3.15	10.20	4.29	8.30	6.27
sqrt	9.90	14.90	2.53	19.40	9.12	5.80	1.70	5.90	1.62	5.20	2.23
passb4_	8.70	13.10	2.23	17.10	8.11	6.10	0.78	0.00	8.70	5.20	1.41
TOPCOSTFCT	7.70	3.90	1.88	0.30	7.11	0.30	7.11	0.00	7.70	0.00	7.70
\$fft2d\$fft2db_	5.50	8.40	1.53	11.20	5.91	3.50	0.73	1.70	2.63	4.20	0.31
_OtsModulus64	3.00	4.60	0.85	5.90	2.80	2.00	0.33	2.50	0.08	1.00	1.33
\$graphroutines\$raphsimfct_	1.40	2.00	0.26	2.10	0.35	0.90	0.18	2.10	0.35	0.00	1.40
for__interp_fmt	0.70	1.00	0.13	1.40	0.70	21.00	588.70	13.10	219.66	12.50	198.91
_OtsDivide64	0.40	0.20	0.10		0.40		0.40		0.40		0.40
cvt_text_to_data	0.30	0.50	0.13	0.50	0.13	7.80	187.50	6.80	140.83	13.50	580.80
for__read_seq_fmt											
_xmit	0.30	0.40	0.03	0.50	0.13	8.90	246.53	9.30	270.00	7.30	163.33
for__cvt_value	0.20	0.30	0.05	0.30	0.05	5.80	156.80	6.80	217.80	6.20	180.00
passf4_	0.20	0.30	0.05	0.40	0.20	5.50	140.45	2.10	18.05	3.10	42.05
sqrtf	0.20	0.30	0.05	0.40	0.20	4.90	110.45	6.80	217.80	11.50	638.45
cfft1_	0.10	0.20	0.10	0.30	0.40	0.00	0.10	0.00	0.10	0.00	0.10
\$fft2d\$fft2df_	0.10	0.20	0.10	0.40	0.90	4.30	176.40	2.50	57.60	2.10	40.00
\$imageroutines\$readimage_	0.10	0.10	0.00	0.10	0.00	1.20	12.10	1.70	25.60	3.10	90.00
for__get_su	0.10	0.10	0.00	0.10	0.00	1.70	25.60	0.40	0.90	1.00	8.10
memset	0.10	0.10	0.00	0.10	0.00	2.00	36.10	1.70	25.60	1.00	8.10
Sum	99.60	99.50	25.37	98.60	91.50	93.50	1735.81	73.60	1261.01	85.20	2012.20
	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi

90% Confidence level (20 entries) = 27.204

### Function level execution profile at optimization level O3

The following table contains function execution profiles and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets as compared to the full SPEC reference datasets. This data was gathered with the hiprof profiling utility. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall execution time spent in the stated function (in the Function column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi are the terms of the chi-squared statistic for the stated function (in the function column).

Function	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi
\$graphroutines\$localmove_	45.40	23.70	10.37	1.50	42.45	0.00	45.40	0.00	45.40	0.00	45.40
\$gaborroutines\$abortrafo_	18.80	29.60	6.20	40.20	24.36	9.30	4.80	9.70	4.40	11.40	2.91
TOPCOSTFCT	9.30	4.90	2.08	0.30	8.71	0.60	8.14	0.00	9.30	0.00	9.30
passb4_	8.60	13.90	3.27	19.20	13.07	4.10	2.35	1.80	5.38	2.50	4.33
__sqrt4	4.70	7.30	1.44	10.00	5.98	2.30	1.23	1.80	1.79	2.50	1.03
\$fft2d\$fft2db_	4.10	6.40	1.29	8.50	4.72	2.60	0.55	1.80	1.29	1.30	1.91
_OtsModulus64	3.70	6.00	1.43	9.00	7.59	1.20	1.69	5.10	0.53		3.70
\$graphroutines\$raphsimfct_	1.60	2.50	0.51	2.70	0.76	0.90	0.31	0.90	0.31	2.50	0.51
for__interp_fmt	0.90	1.60	0.54	2.00	1.34	23.00	542.68	23.00	542.68	12.70	154.71
_OtsDivide64	0.40	0.20	0.10		0.40		0.40		0.40		0.40
for_read_seq_fmt_xmit	0.40	0.70	0.23	1.30	2.03	12.20	348.10	10.10	235.23	10.10	235.23
cvt_text_to_data	0.40	0.60	0.10	0.80	0.40	7.80	136.90	5.50	65.03	11.40	302.50
for__cvt_value	0.30	0.50	0.13	0.70	0.53	6.40	124.03	10.10	320.13	7.60	177.63
sqrtf	0.30	0.40	0.03	0.50	0.13	6.40	124.03	6.50	128.13	7.60	177.63
passf4_	0.20	0.30	0.05	0.50	0.45	4.70	101.25	1.80	12.80	3.80	64.80
cfftbl_	0.20	0.30	0.05	0.50	0.45	0.00	0.20	0.00	0.20	0.00	0.20
_OtsFill	0.10	0.20	0.10	0.20	0.10	2.00	36.10	1.40	16.90		0.10
\$fft2d\$fft2df_	0.10	0.20	0.10	0.20	0.10	2.60	62.50	1.40	16.90	1.30	14.40
memset	0.10	0.10	0.00	0.10	0.00	2.60	62.50	0.50	1.60	1.30	14.40
\$imageroutines\$readimage_	0.10	0.10	0.00	0.10	0.00	0.60	2.50	0.50	1.60	1.30	14.40
for__get_su	0.10	0.10	0.00	0.10	0.00	2.00	36.10	1.80	28.90	2.50	57.60
Sum	99.80	99.60	28.02	98.40	113.57	91.30	1641.76	83.70	1438.89	79.80	1283.09
	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi

90% Confidence level (21 entries) = 28.412

### Function level execution profile at optimization level O4

The following table contains function execution profiles and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets as compared to the full SPEC reference datasets. This data was gathered with the hiprof profiling utility. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall execution time spent in the stated function (in the Function column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi are the terms of the chi-squared statistic for the stated function (in the function column).

Function	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi
\$graphroutines\$localmove_	46.50	24.50	10.41	1.50	43.55	0.30	45.90	0.00	46.50	0.00	46.50
\$gaborroutines\$abortrafo_	18.60	29.30	6.16	39.80	24.16	8.90	5.06	8.90	5.06	3.00	13.08
TOPCOSTFCT	9.30	5.00	1.99	0.30	8.71	0.60	8.14	0.00	9.30	0.00	9.30
passb4_	8.50	13.90	3.43	19.40	13.98	5.10	1.36	1.50	5.76	2.00	4.97
__sqrt4	4.50	7.30	1.74	10.50	8.00	1.90	1.50	3.00	0.50	2.00	1.39
\$fft2d\$fft2db_	3.90	6.40	1.60	8.90	6.41	2.50	0.50	1.00	2.16	4.00	0.00
_OtsModulus64	3.70	6.00	1.43	8.60	6.49	1.90	0.88	3.90	0.01	3.00	0.13
\$graphroutines\$raphsimfct_	1.60	2.40	0.40	2.70	0.76	1.30	0.06	0.50	0.76	0.00	1.60
for__interp_fmt	0.80	1.40	0.45	2.10	2.11	20.60	490.05	21.70	546.01	7.10	49.61
_OtsDivide64	0.40	0.20	0.10	0.00	0.40		0.40		0.40		0.40
for_read_seq_fmt_xmit	0.40	0.70	0.23	0.80	0.40	10.10	235.23	7.90	140.63	15.20	547.60
cvt_text_to_data	0.30	0.60	0.30	0.80	0.83	8.20	208.03	8.40	218.70	11.10	388.80
for__cvt_value	0.30	0.50	0.13	0.60	0.30	7.60	177.63	8.40	218.70	8.10	202.80
sqrtf	0.30	0.40	0.03	0.70	0.53	8.90	246.53	6.90	145.20	6.10	112.13
passf4_	0.20	0.30	0.05	0.40	0.20	4.70	101.25	0.50	0.45	3.00	39.20
cfft1_	0.20	0.30	0.05	0.30	0.05	0.30	0.05	0.00	0.20	0.00	0.20
\$fft2d\$fft2df_	0.10	0.20	0.10	0.20	0.10	3.50	115.60	2.00	36.10	2.00	36.10
\$imageroutines\$readimage_	0.10	0.10	0.00	0.20	0.10	1.30	14.40	1.00	8.10	0.00	0.10
memset	0.10	0.10	0.00	0.10	0.00	1.60	22.50	0.50	1.60	1.00	8.10
for__get_su	0.10	0.10	0.00	0.10	0.00	0.90	6.40	1.50	19.60	2.00	36.10
Sum	99.90	99.70	28.60	98.00	117.08	90.20	1681.47	77.60	1405.73	69.60	1498.12
	Ref	Train	Train Chi	Test	Test Chi	LgRed	LgRed Chi	MdRed	MdRed Chi	SmRed	SmRed Chi

90% Confidence level (20 entries) = 27.204

### **Instruction Mix profile at optimization level o0**

The following table contains instruction mix breakdown and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets, as compared to the full SPEC dataset. This data was gathered with the sim-profile simulator for the SimpleScalar suite. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall instructions of the stated instruction type (in the Inst Type column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi columns are the terms of the chi-squared statistic for the stated instruction type (in the Inst Type column).

187.facerec

O0 Program

Inst Type	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi
load	41.82	42.51	0.01	43.08	0.04	40.64	0.03	40.96	0.02	39.91	0.09
store	3.66	4.07	0.05	4.43	0.16	5.30	0.73	5.24	0.68	5.34	0.77
unconditional											
branch	0.67	0.65	0.00	0.64	0.00	1.19	0.40	1.16	0.36	1.24	0.48
conditional branch	2.17	1.70	0.10	1.34	0.32	3.24	0.53	3.15	0.44	3.38	0.67
int computation	46.76	46.22	0.01	45.74	0.02	45.71	0.02	44.97	0.07	46.46	0.00
fp computation	4.92	4.84	0.00	4.77	0.00	3.89	0.22	4.50	0.04	3.65	0.33
trap	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Sum	100.00	99.99	0.17	100.00	0.55	99.97	1.94	99.98	1.61	99.98	2.35
	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi

90% Confidence level (7 entries) = 10.645

187.facerec

### **Instruction Mix profile at optimization level o1**

The following table contains instruction mix breakdown and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets, as compared to the full SPEC dataset. This data was gathered with the sim-profile simulator for the SimpleScalar suite. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall instructions of the stated instruction type (in the Inst Type column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi columns are the terms of the chi-squared statistic for the stated instruction type (in the Inst Type column).

187.facerec

O1 Program

Inst Type	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi
load	20.45	23.20	0.37	26.14	1.58	24.87	0.96	25.75	1.37	24.66	0.87
store	7.04	8.80	0.44	10.67	1.87	10.67	1.87	10.51	1.71	10.63	1.83
unconditional											
branch	1.48	1.64	0.02	1.83	0.08	2.62	0.88	2.54	0.76	2.70	1.01
conditional branch	4.51	3.97	0.06	3.41	0.27	6.67	1.03	6.48	0.86	6.89	1.26
int computation	56.13	50.81	0.50	45.13	2.16	46.79	1.55	45.04	2.19	47.30	1.39
fp computation	10.39	11.58	0.14	12.82	0.57	8.34	0.40	9.62	0.06	7.77	0.66
trap	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Sum	100.00	100.00	1.53	100.00	6.53	99.96	6.70	99.94	6.95	99.95	7.01
	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi

90% Confidence level (7 entries) = 10.645

187.facerec



**Instruction Mix profile at optimization level o2**

The following table contains instruction mix breakdown and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets, as compared to the full SPEC dataset. This data was gathered with the sim-profile simulator for the SimpleScalar suite. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall instructions of the stated instruction type (in the Inst Type column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi columns are the terms of the chi-squared statistic for the stated instruction type (in the Inst Type column).

187.facerec

O2 Program

Inst Type	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi
load	23.52	23.05	0.01	22.56	0.04	22.05	0.09	22.09	0.09	22.42	0.05
store	5.67	8.15	1.08	10.95	4.92	10.40	3.95	10.28	3.75	10.74	4.53
unconditional											
branch	0.84	1.08	0.07	1.39	0.36	2.71	4.16	2.66	3.94	2.81	4.62
conditional branch	7.47	6.76	0.07	5.97	0.30	9.35	0.47	9.01	0.32	9.49	0.55
int computation	45.22	41.16	0.36	36.64	1.63	43.71	0.05	42.52	0.16	43.79	0.05
fp computation	17.29	19.79	0.36	22.49	1.56	11.72	1.79	13.38	0.88	10.69	2.52
trap	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Sum	100.01	99.99	1.96	100.00	8.81	99.94	10.52	99.94	9.14	99.94	12.32
	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi

90% Confidence level (7 entries) = 10.645

187.facerec

### **Instruction Mix profile at optimization level o3**

The following table contains instruction mix breakdown and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets, as compared to the full SPEC dataset. This data was gathered with the sim-profile simulator for the SimpleScalar suite. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall instructions of the stated instruction type (in the Inst Type column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi columns are the terms of the chi-squared statistic for the stated instruction type (in the Inst Type column).

187.facerec

O3 Program

Inst Type	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi
load	26.94	26.91	0.00	26.86	0.00	24.14	0.29	24.48	0.22	24.58	0.21
store	6.39	9.27	1.30	12.56	5.96	10.96	3.27	10.68	2.88	11.38	3.90
unconditional branch	0.94	1.22	0.08	1.57	0.42	2.84	3.84	2.74	3.45	2.94	4.26
conditional branch	5.73	4.84	0.14	3.84	0.62	8.97	1.83	8.47	1.31	9.02	1.89
int computation	40.60	35.38	0.67	29.53	3.02	40.70	0.00	39.70	0.02	40.77	0.00
fp computation	19.39	22.38	0.46	25.64	2.01	12.32	2.58	13.85	1.58	11.24	3.43
trap	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Sum	99.99	100.00	2.65	100.00	12.04	99.93	11.81	99.92	9.46	99.93	13.67
	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi

90% Confidence level (7 entries) = 10.645

187.facerec

### Instruction Mix profile at optimization level o4

The following table contains instruction mix breakdown and goodness-of-fit chi-squared statistic values for the train, test, large (LgRed), medium (MdRed), and small (SmRed) reduced datasets, as compared to the full SPEC dataset. This data was gathered with the sim-profile simulator for the SimpleScalar suite. \*90% Conf = Critical value of the chi-squared statistic at the 90 percent confidence level. Numbers in the Ref, Train, Test, LgRed, MdRed, and SmRed columns are the percent of overall instructions of the stated instruction type (in the Inst Type column). Numbers in the Train Chi, Test Chi, LgRed Chi, MdRed Chi, and SmRed Chi columns are the terms of the chi-squared statistic for the stated instruction type (in the Inst Type column).

187.facerec

O4 Program


Inst Type	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi
load	26.74	26.80	0.00	26.85	0.00	24.14	0.25	24.48	0.19	24.58	0.17
store	6.39	9.27	1.30	12.56	5.96	10.96	3.27	10.69	2.89	11.38	3.90
unconditional											
branch	0.94	1.22	0.08	1.57	0.42	2.84	3.84	2.74	3.45	2.94	4.26
conditional branch	5.73	4.84	0.14	3.83	0.63	8.97	1.83	8.47	1.31	9.02	1.89
int computation	40.81	35.49	0.69	29.54	3.11	40.70	0.00	39.70	0.03	40.76	0.00
fp computation	19.39	22.38	0.46	25.64	2.01	12.32	2.58	13.85	1.58	11.24	3.43
trap	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Sum	100.00	100.00	2.67	99.99	12.14	99.93	11.77	99.93	9.45	99.92	13.64
	Ref	Train	Train Chi	Test	Test Chi	Lgred	Lgred Chi	Mdred	Mdred Chi	Smred	Smred Chi

90% Confidence level (7 entries) = 10.645

187.facerec

## Cache profile

The following chart shows level 1 data cache miss rates for the Ref, Train, Test, LgRed, MdRed, and SmRed datasets. This data was gathered with the sim-cache simulator from the SimpleScalar suite. Miss rate is stated as the ratio of level 1 misses to total level 1 accesses.

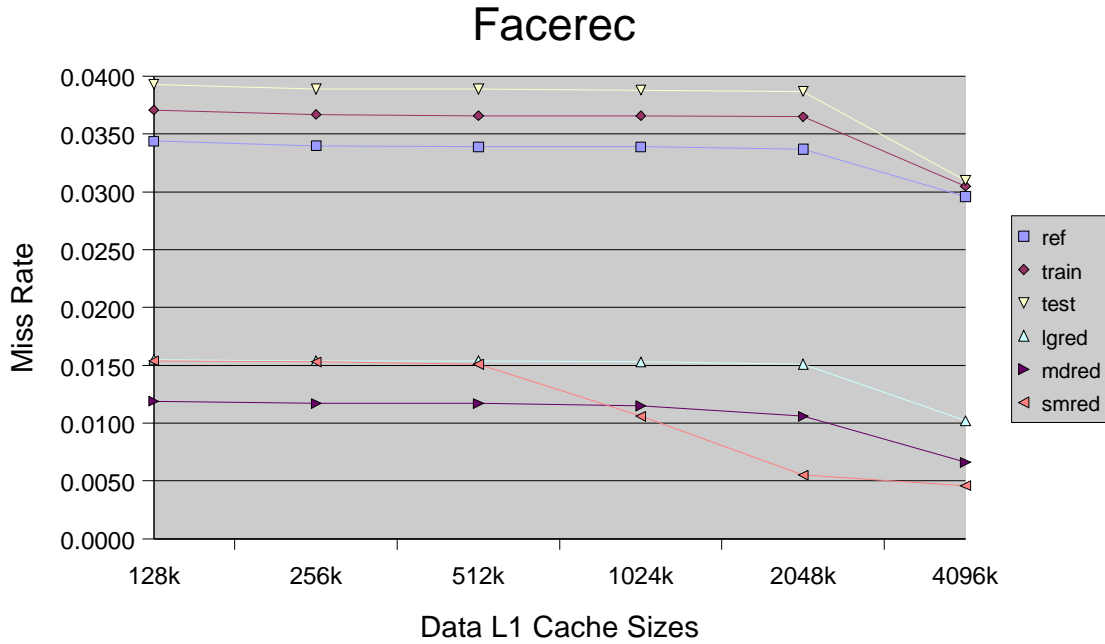

### ***Instruction Counts for all Datasets***

The following table shows the instruction counts and estimated simulation time for the reference (Ref), train, test, large (LgRed), medium(MdRed), and small (SmRed) reduced datasets. Instruction counts are from the simulated benchmark, compiled at optimization level O0 and run with each input dataset. Estimated simulation times are calculated using a 45,000 instructions per second factor. This factor was determined by observing the simulation rate of a simulator similar to sim-outorder, run on a machine similar to the SPEC 2000 reference machine (a 333 Mhz Sparc).

	<u>Ref</u>	<u>Train</u>	<u>Test</u>	<u>LgRed</u>	<u>MdRed</u>	<u>SmRed</u>
Instruction Count						
(in millions)	1016940	231352	23570	859	533	207
Simulation Time						
(in hours)	6277.4	1423.1	145.5	5.3	3.3	1.3